


WF SERIES**W5-610SF**

5" KEVLAR FIBER WOOFER

- HOME HI-FI, HOME THEATER, MID-BASS APPLICATION
- DIE CAST BASKET
- KEVLAR FIBER CONE WITH WIDE RANGE TEMPERATURE RUBBER SURROUND, STABLE FO
- MAGNETICALLY SHIELDED

DIAPHRAGM MTL	Kevlar Fiber
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6 Ω
SENSITIVITY 1W/1m	87 dB
FREQUENCY RESPONSE	45-7K Hz
FREE AIR RESONANCE	45 Hz
VOICE COIL DIAMETER	25.4 mm
AIR GAP HEIGHT	6 mm
RATED POWER INPUT	28 W
MAXIMUM POWER INPUT	56 W
FORCE FACTOR, BL	6.21 TM
MAGNET WEIGHT (14oz)	409 g
MOVING MASS	10 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	1295 μMN^{-1}
EFFEC.PISTON AREA	0.0094 M ²
Levc	0.66 mH
Zo	107.54 ohm
X-max	3.7 mm
Vas	16.3 Litr.
Qts	0.40
Qms	7.25
Qes	0.43

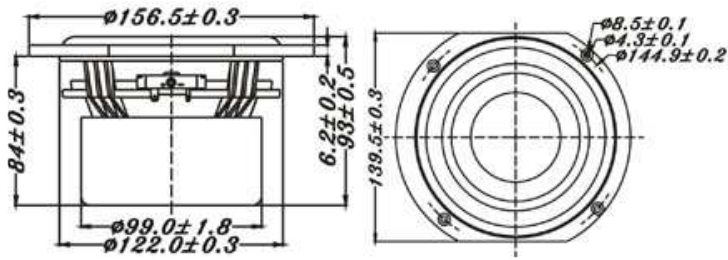

TB SPEAKERS

VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com

CLOSE